


Model 40A Accelerometer

±25g to ±2000g Dynamic Range
Fluid Damped, DC Response
Compliant to SAE J2570
Temperature Compensated



The Model 40A Accelerometer is a small piezoresistive accelerometer designed to be compliant with the latest SAE J211/J2570 (AUG2009) specifications. This unit features built-in mechanical stops, anodized aluminum alloy housing and flexible cable output. The sensing element is fluid damped to extend useful frequency range and reduce the adverse effect of high frequencies ringing caused by sensor resonance.

dimensions

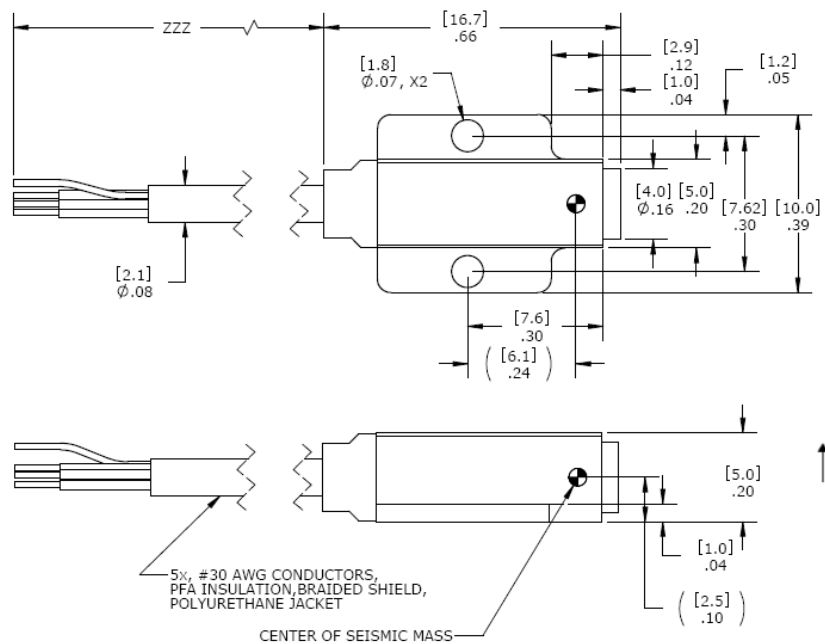


FEATURES

- Silicon Piezoresistive Elements
- ±25 to ±2,000 g Ranges
- 2-10 Vdc Excitation
- -20 to +80 °C Temperature Range
- Critically Damped Sensor
- Low Transverse Sensitivity
- <±10 mV Zero Offset

APPLICATIONS

- Safety Crash Testing
- Auto
- Truck
- Recreational Vehicles
- Shock Testing

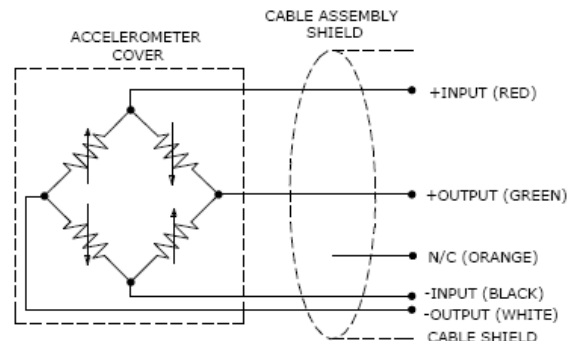

Model 40A Accelerometer

performance specifications


All values are typical at $\pm 24^{\circ}\text{C}$, 100 Hz and 10 Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

Parameters	-0025	-0100	-0250	-0500	-1000	-2000	Notes	
DYNAMIC								
Range(g)	± 25	± 100	± 250	± 500	± 1000	± 2000		
Sensitivity (mV/g) ¹	6.0	1.5	0.60	0.30	0.15	0.075	@ 10Vdc excitation	
Frequency Response (Hz)	0-200	0-400	0-600	0-1100	0-1500	0-2500	+2.5%/-8%	
	0-350	0-675	0-1100	0-2000	0-2700	0-4500	+2.5%/-20%	
Natural Frequency (Hz)	>800	>1500	>2500	>4500	>6000	>10000		
Non-Linearity (% FS)	± 1	± 1	± 1	± 1	± 1	± 1		
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.7	Typical	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3		
Shock Limit (g)	5000	10000	10000	10000	10000	10000		
ELECTRICAL								
Zero Acceleration Output (mV)	$\leq \pm 10$							
Excitation (Vdc)	2 to 10							
Input Resistance (Ω)	2000						Typical	
Output Resistance (Ω)	1000						Typical	
Insulation Resistance (M Ω)	>100						@100Vdc	
Ground Isolation	Isolated from mounting surface.							
ENVIRONMENTAL								
Thermal Zero Shift (%FSO/ $^{\circ}\text{C}$)	± 0.05						From -10 to $+50^{\circ}\text{C}$	
Thermal Sensitivity Shift (%/ $^{\circ}\text{C}$)	± 0.1						From -10 to $+50^{\circ}\text{C}$	
Operating Temperature ($^{\circ}\text{C}$)	-20 to +80							
Storage Temperature ($^{\circ}\text{C}$)	-20 to +80							
Humidity	Epoxy Sealed, IP61							
PHYSICAL								
Case Material / Cover Material	Anodized Aluminum							
Cable (Integral 30 Foot Cable)	4x #30 AWG Conductors, PFA Insulated, Braided Shield, PU Jacket							
Weight (grams)	<5						Cable Not Included	
Mounting	2x 0-80 x 3/16 socket head cap screws							Torque 3 lb-in
OPTION								
Model 40L-GGGG-CCC	With transverse sensing direction (parallel to mounting surface)							
¹ Output is ratiometric to excitation voltage. Tolerance is +50%/-30%.								
Calibration supplied:	CS-FREQ-0100	NIST Traceable Amplitude Calibration from 20Hz to $\pm 1\text{dB}$ Frequency Limit						
Supplied accessories:	AC-A03923	2x #0-80 (3/16" length) Socket Head Cap Screw, 2x #0 Washer, 1x Allen Key						
Optional accessories:	101	Three Channel DC Signal Conditioner Amplifier						
	140	Auto-zero Inline Amplifier						

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

Model 40A Accelerometer

performance specifications

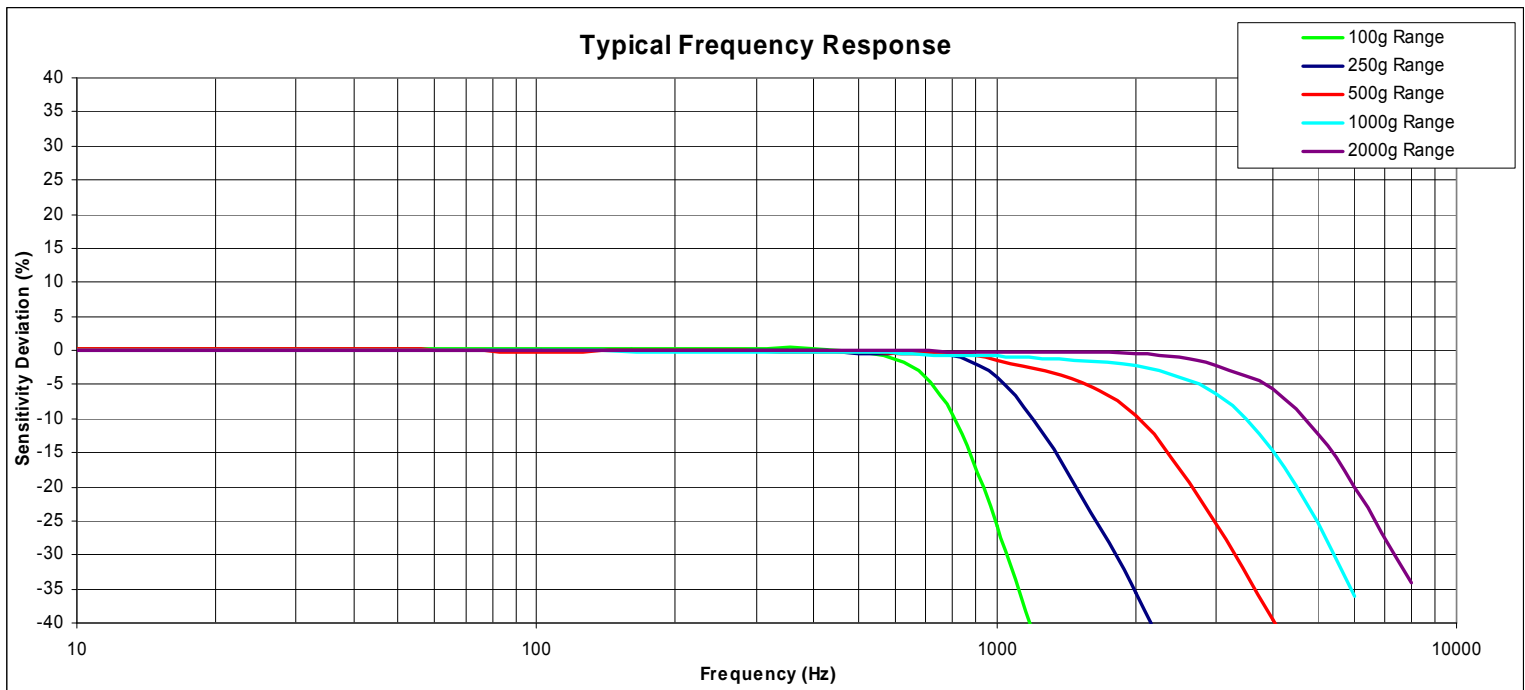

ordering info

PART NUMBERING Model Number+Range +Cable Length+Options

40A- GGGG-CCCT-ZZZ

| | | | Options

| | | 1% Transverse Sensitivity when "T" is present

| | Cable (360 is 360 inches)

| Range (0100 is 100 g)

Optional Dash Numbers

-001 5Vdc Calibration

-002 2Vdc Calibration

Example: 40A-2000-360

Model 40A, 2000g, 360" (30ft) Cable, No Options