

Preliminary Datasheet

General description

The INNALABS' INN-108 Quartz Gyroscopes are compact, high reliability, solid-state single-axis angular rotation sensors designed for use by original equipment manufacturers (OEM). It is based on monolithic quartz sensing element, and features internal power regulation, and DC input/high-level DC output operation. There are two versions of INN-108 Quartz Gyros. The first one provides a high-level 0 to +5.0 Vdc output, and the second version provides a high-level bipolar output of ± 5 Vdc, and is designed for use with conventional double-sided power supplies.

Applications

- Antenna & Platform Stabilization
- GPS Augmentation:
 - Navigation Systems
 - Robotics & Vehicles Location Systems
 - Precision Farming
- Instrumentation
- Factory Automation
- Medical/Orthopedic



Features


- Micromachined Sensor
- DC Input, DC Output Operation
- Compact Design & Low Cost
- Internal Power Regulation
- Wide Temperature Range
- Shock Resistant
- Fast Start-Up

Technical parameters



#	Parameters	Units	Values
1	Measurement range	deg/sec	$\pm 50, \pm 100, \pm 200, \pm 500$
2	Input Voltages	V	+8 ... +18 or ± 8 ... ± 18
3	Full Scale Output	V	0 ... 5 or ± 5
4	Short Term Bias stability at normal temp., 100 sec	deg/sec	$\leq 0.05^*$
5	Bias Variation over Temperature	deg/sec	≤ 3
6	G Sensitivity (Typical)	deg/sec/g	≤ 0.06
7	Scale Factor temperature sensitivity	%/°C	0.06
8	Scale Factor nonlinearity	%FS	≤ 0.05
9	Start up time (Typical)	sec	≤ 1
10	Bandwidth	Hz	> 50
11	Threshold/Resolution	deg/sec	$\leq 0.01^*$
12	Output Noise	deg/sec/ $\sqrt{\text{Hz}}$	$\leq 0.02^*$
13	Operating temperature	°C	-40 ... +85
14	Storage temperature	°C	-55 ... +100
15	Vibration operational	g RMS, Hz	5, 20 ... 2000
16	Vibration survival	g RMS, Hz	10, 20 ... 2000
17	Shock	g	200
18	Weight	grams	≤ 50

* Values indicated for ± 100 deg/sec range

Dimensions drawing (mm):

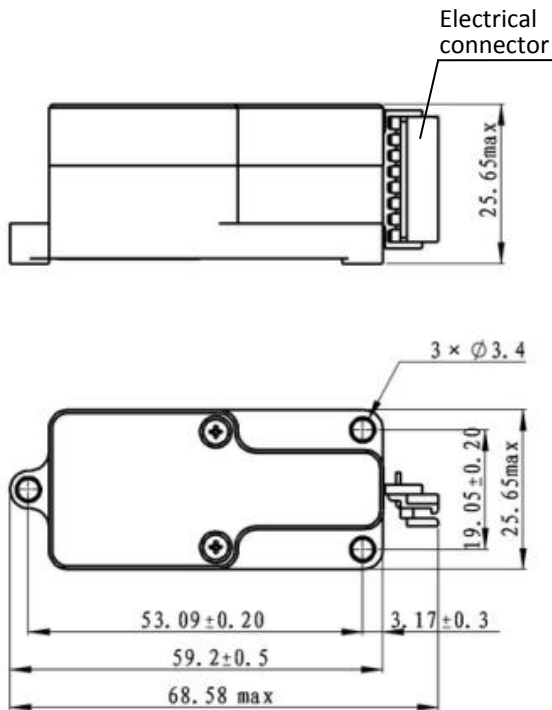

Connection description:

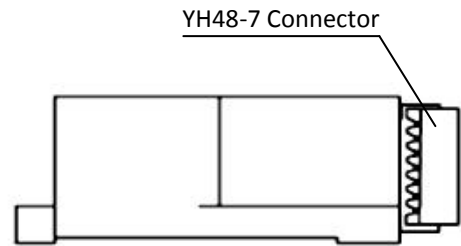

YH48-7 Connector is designed for
Quartz Gyros INN-108

Interface description:

PIN	Signal
1	Negative Power Supply
2	Positive Power Supply
3	Power Ground
4	Signal Ground
5	Output Signal
6	NC
7	NC

Note: power ground and signal ground are connected together inside the product.

Disclaimer: the document is subject to change without notice. INNALABS reserves the right to make changes to any product or technology herein. INNALABS does not assume any liability arising out of the application or use of the product.