

# MSP 340 Pressure Transducer



- Low Cost OEM
- 100% Leak Proof
- No O-Rings
- No Silicon Oil
- No Welds

Shown with Packard Connector

## DESCRIPTION

The MSP 340 series pressure transducers from the Microfused™ line of MEAS, high volume, commercial and industrial applications. This series is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam, and mildly corrosive fluids.

The transducer pressure cavity is machined from a solid piece of 17-4 PH stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a leak-proof, all metal sealed system. There are no O-rings, welds or organics exposed to the pressure media. The durability is excellent.

MEAS' proprietary Microfused™ technology, derived from demanding aerospace applications, employs micromachined silicon piezoresistive strain gages fused with high temperature glass to a stainless steel diaphragm. This approach achieves media compatibility simply and elegantly while providing an exceptionally stable sensor without the p-n junctions of conventional micromachined sensors.

This product is geared to the OEM customer who uses medium to high volumes. The standard version is suitable for many applications, but the dedicated design team at our Transducer Engineering Center stands ready to provide a semi-custom design where the volume and application warrants.

## FEATURES

- One-Piece Stainless Steel Construction
- Ranges up to 10k psi or 700 Bar
- mV or Amplified Outputs
- Ultra Compact Construction
- Hermetically Isolated Sensor Technology

## APPLICATIONS

- Pumps and Compressors
- Hydraulic/Pneumatic Systems
- After Market Automotive
- Tank Pressure in Breathing Apparatuses
- Agriculture – Sprayers and Dusters
- Refrigeration – Freon and Ammonia Based

## STANDARD RANGES

Range	psig	Range	Barg
0 to 50	•	0 to 3	•
0 to 100	•	0 to 7	•
0 to 300	•	0 to 20	•
0 to 500	•	0 to 35	•
0 to 1k	•	0 to 70	•
0 to 3k	•	0 to 200	•
0 to 5k	•	0 to 350	•
0 to 10k	•	0 to 700	•

# MSP 340 Pressure Transducer

## PERFORMANCE SPECIFICATIONS

Supply Voltage: 5.0V, Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Span Setting	-2		2	%Span	1
Accuracy (combined non linearity, hysteresis, and repeatability)	-1		1	%Span	2
Temperature Error –Zero	-2		2	%Span	
Temperature Error –Span	-2		2	%Span	
Supply Current (0 – 100mV, 0.5 – 4.5V)			10	mA	
Supply Current (1 – 5V)			15	mA	
Long Term Stability (1 year)	0.25		0.25	%Span	
Output Load	100			kΩ	
Compensated Temperature	0		55	°C	
Operating Temperature	-20		+85	°C	3
Storage Temperature	-40		+125	°C	3
Burst Pressure	5X			Rated	
Vibration	±20			g	4
Shock (11ms)	50			g	5
Pressure Cycles (Zero to Full Scale)	10			Million	
Pressure Overload	2X			Rated	
Output Noise			2	mVRMS	
Bandwidth (-3dB)	1			kHz	
Weight				grams	
Media Compatibility	All Materials Compatible with 17-4 Stainless Steel				

For custom configurations, consult factory.

### Notes

- 1 Ratiometric to supply.
- 2 Best fit straight line.
- 3 Maximum temperature range for product with standard cable is -20°C to +105°C.
- 4 Per MIL-STD-810C, Procedure 514.2, Figure 514.2-2, Curve L.
- 5 1/2 sine per MIL-STD 202F Method 213B condition A.

# MSP 340 Pressure Transducer

## DIMENSIONS

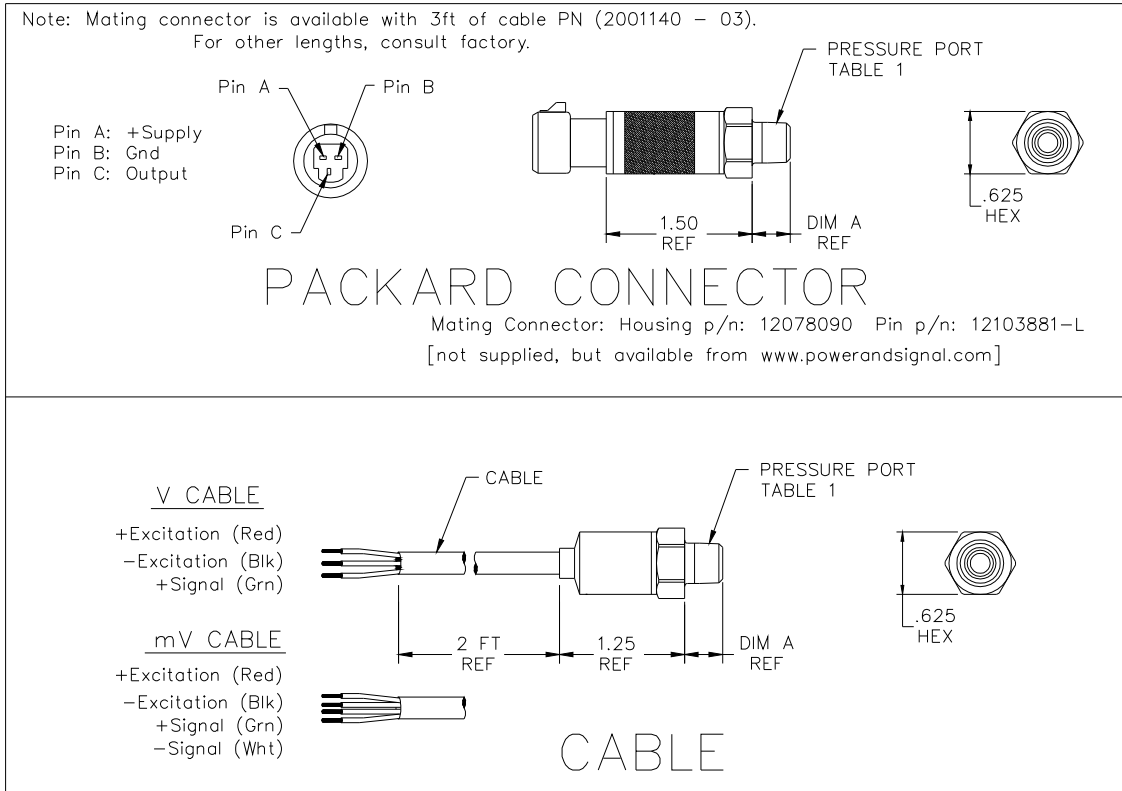


TABLE 1		
PRESSURE PORT		
CODE	PORT	DIM A
2	1/4-19 BSP	0.47 [11.94]
3	1/8 BSP	TBD [TBD]
4	7/16-20UNF MALE O-RING	0.36 [9.14]
5	1/4-18 NPT	0.64 [16.26]
6	1/8-27 NPT	0.53 [13.46]

# MSP 340 Pressure Transducer

## OUTPUT OPTIONS

Code	Output	MIN	Supply(V)	
			TYP	MAX
2	0 – 100 mV (ratiometric)	2.5	5	12
3	0.5 – 4.5 V (ratiometric)	4.75	5	5.25
4	1 – 5 V	8		30


Packard connector not available with mV output.

Wiring Code

Code	Output	+Supply	-Supply	+Out	-Out
2	0 – 100 mV (ratiometric)	Red	Black	Green	White
3	0.5 – 4.5 V (ratiometric)	Red/Pin A	Black/Pin B	White/Pin C	N/A
4	1 – 5 V	Red/ Pin A	Black/ Pin B	White/Pin C	N/A

## ORDERING INFORMATION

M3421-000002-050PG

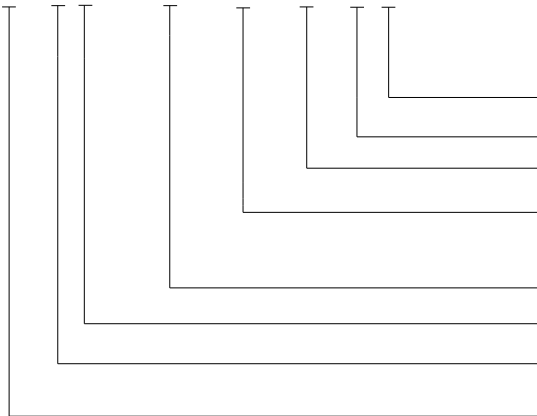

Type (G = Gage)

Units (P = psi, B = Bar)

Pressure Range (050P = 50psi, 01KP = 1000psi, 10KP = 10,000psi)

Pressure Port (2 = 1/4-19BSP [G1/4], 3 = 1/8BSP [G1/8], 4 = 7/16-20UNF, 5 = 1/4-18NPT, 6 = 1/8-27NPT)

Specials (nnnnn = Custom Drawing)

Electrical Connection (1 = 2ft Cable, 4 = Integral Packard)

Output (2 = 0 - 100mV, 3 = .5 - 4.5V ratio, 4 = 1 - 5V)

Model

### NORTH AMERICA

Measurement Specialties  
45738 Northport Loop West  
Fremont, CA 94538  
Tel: 1-800-767-1888  
Fax: 1-510-498-1578  
Sales: [pfg.cs.amer@meas-spec.com](mailto:pfg.cs.amer@meas-spec.com)

### EUROPE

Measurement Specialties  
(Europe), Ltd.  
26 Rue des Dames  
78340 Les Clayes-sous-Bois, France  
Tel: +33 (0) 130 79 33 00  
Fax: +33 (0) 134 81 03 59  
Sales: [pfg.cs.emea@meas-spec.com](mailto:pfg.cs.emea@meas-spec.com)

### ASIA

Measurement Specialties  
(China), Ltd.  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518107  
China  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
Sales: [pfg.cs.asia@meas-spec.com](mailto:pfg.cs.asia@meas-spec.com)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.