

# P101 Pressure Transducer



- Heavy Industrial Pressure Transducer
- Ranges from 10 to 1000 bars
- Several available options
- Harsh environment

## DESCRIPTION

The P101 is a pressure transducer designed to measure pressure under a wide variety of conditions, including hostile environments and temperatures up to 150 °C. Its stainless steel body and sealing options render the P101 ideal for use in chemically aggressive environments, such as Skydrol® aviation hydraulic fluid.

The sensing element is fitted with a temperature compensated Wheatstone bridge equipped with thin strain gauges. The P101-A1/A2 Series include a high level output.

With many years of experience as a designer and manufacturer of sensors, Measurement Specialties, Inc. has the expertise to customize and/or design sensors for specific uses and testing environments. To meet your needs we also offer complete turnkey systems. Our conditioning electronics can power the sensor, amplify the electronic signal, and display the data digitally. A turnkey measurement system arrives with matched components, formatted, calibrated and ready for your immediate use.

## FEATURES

- Full Scale Range from 0-10 bar to 0-1000 bar
- Stainless Steel Diaphragm
- High Level Output Available
- Optional Protection

## APPLICATIONS

- General Industries
- Regulation measurement
- Harsh environment
- 

## STANDARD RANGES

Range in bar	10	20	50	100	200	350	500	1k
--------------	----	----	----	-----	-----	-----	-----	----

# P101 Pressure Transducer

## CHARACTERISTICS

**Ambient Temperature: 20±1° C (unless otherwise specified)**

Parameters	
Operating Temperature Range (OTR)	-20 to 80° C [-4 to 176°F] (-20 to 150°C optional)
Compensated Temperature Range (CTR)	0 to 50° C [32 to 122°F]
Zero Shift in CTR	<2% / 50° C [100°F]
Sensitivity Shift in CTR	<2% / 50° C [100°F]
Range (F.S.)	See standard ranges table (G = Gauge type only)
Over-Range	
Without Damage	1.5 x F.S.
Without Destruction	3 x F.S.
Accuracy	
Combined Non-Linearity & Hysteresis	≤±0.3% F.S.

### Electrical Characteristics


Model	P101	P101-A1	P101-A2
Supply Voltage	10 Vdc	10 - 30Vdc	±15Vdc (±12 to ±18Vdc)
F.S. Output 10 bar model	1 mV/V	4V ±5% F.S.	5V ±5% F.S.
F.S. Output ≥20 bar model	2 mV/V	4V ±5% F.S.	5V ±5% F.S.
Zero Offset	<± 5% F.S.	0.5V ±5% F.S.	0 V ±5% F.S.
Input Impedance/Consumption	350 Ω	<50mA	<50mA
Output Impedance	350 Ω	<10Ω	<10Ω
Insulation under 50Vdc	≥100 MΩ	≥100 MΩ	≥100 MΩ

### Notes

1. Electrical Termination: Cable gland Termination, 2m [6.6ft] cable standard length
2. Material: Stainless steel diaphragm, body in aluminum
3. Pressure connector: Nova Swiss ¼ NPT female
4. Weight: <300g [0.66lb] without cable

# P101 Pressure Transducer

## DIMENSION & WIRING SCHEMATIC (METRIC ONLY)

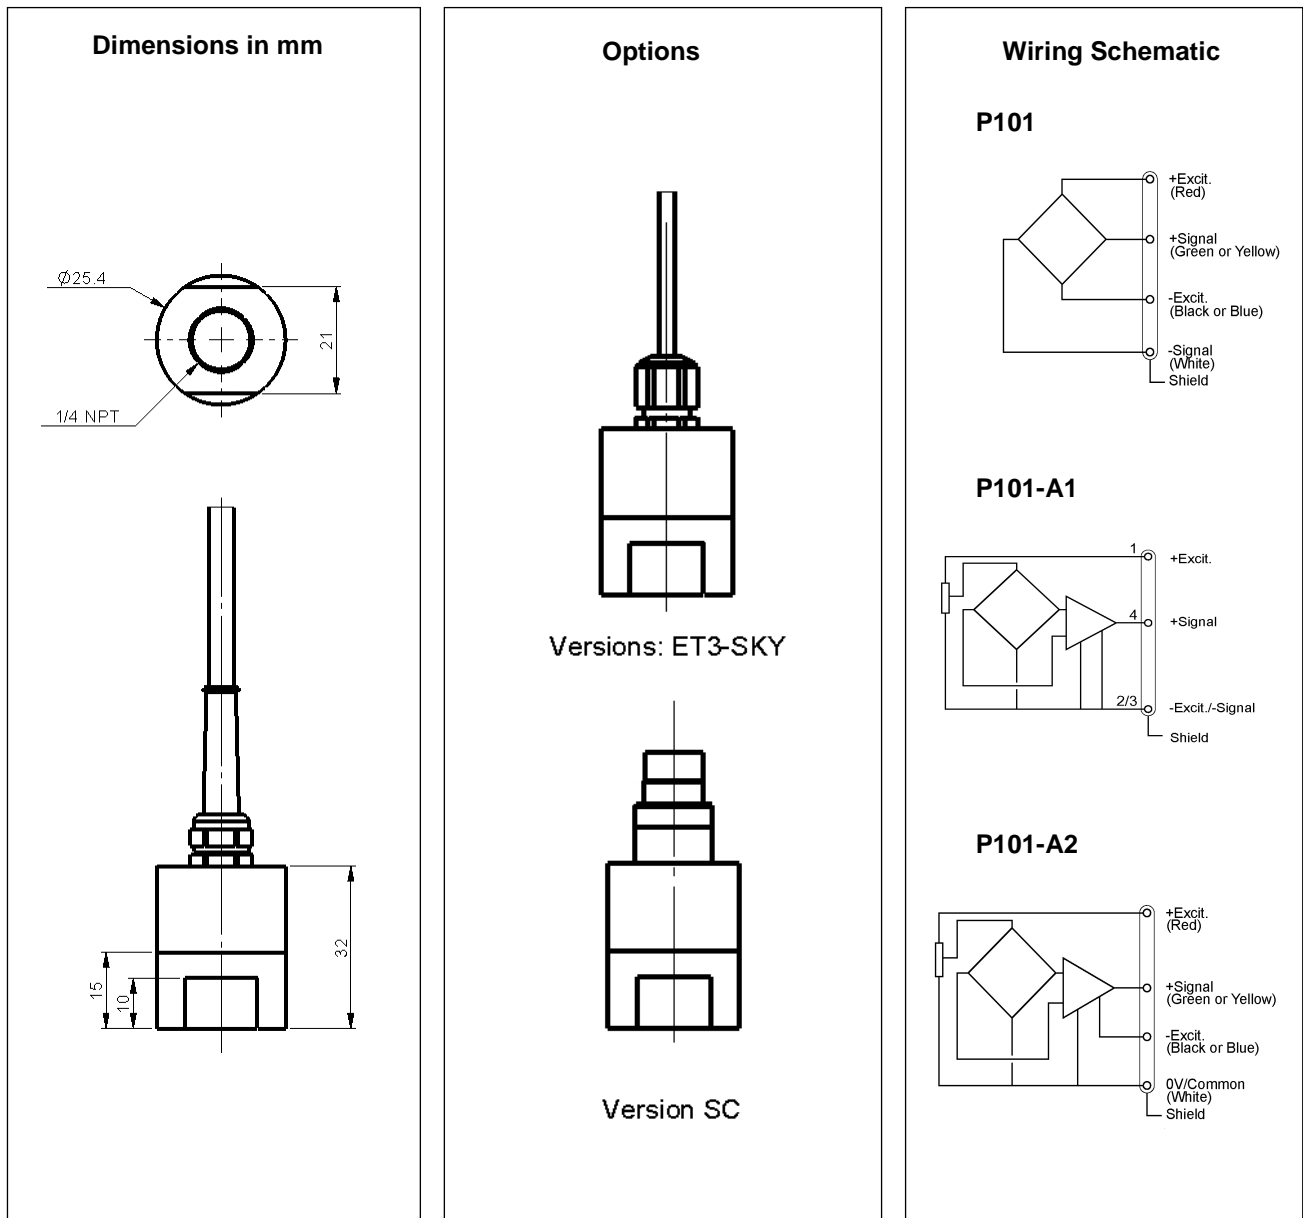


# P101 Pressure Transducer

## OPTIONS

<b>A1</b>	: Unipolar tension
<b>A2</b>	: Bipolar tension
<b>HA</b>	: Accuracy (CNL&H) $\leq \pm 0.15\%$ F.S.
<b>SI</b>	: Sensitivity shift 0.5 % / 50°C
<b>ZI</b>	: CTR -20 to 100° C [-4 to 212° F]
<b>ET"x"</b>	: CTR -40 to 120° C [-40 to 248° F]
<b>SC</b>	: Connector output
<b>SKY</b>	: Skydrol protection
<b>LC"x"</b>	: Additional cable length in m ( <b>Note</b> : "X" = Custom value)

## ORDERING INFORMATION

**P101 – A1 – 200BG – HA/LC "X"**

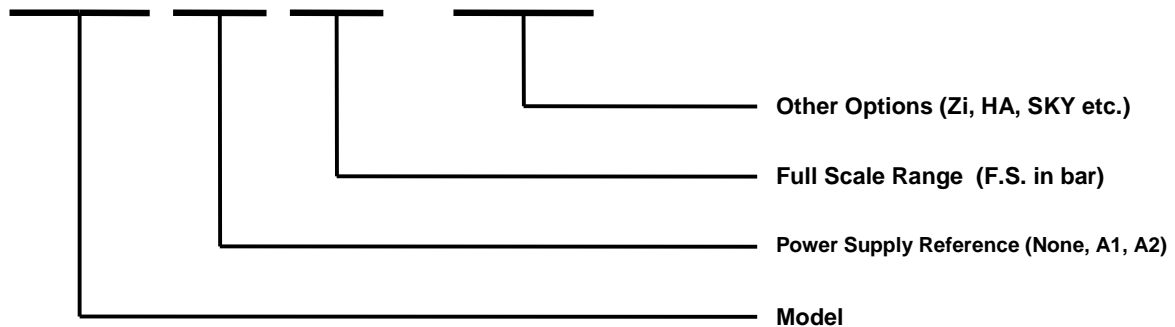

### NORTH AMERICA

Measurement Specialties, Inc.  
1000 Lucas Way  
Hampton, VA 23666  
USA  
Tel: 1-757-766-1500  
Fax: 1-757-766-4297  
[pvg.cs.amer@meas-spec.com](mailto:pvg.cs.amer@meas-spec.com)

### EUROPE

Measurement Specialties  
(Europe), Ltd.  
26 Rue des Dames  
78340 Les Clayes-Sous-Bois,  
France  
Tel: +33 (0) 130 79 33 00  
Fax: +33 (0) 134 81 03 59  
[pfg.cs.emea@meas-spec.com](mailto:pfg.cs.emea@meas-spec.com)

### ASIA

Measurement Specialties  
(China), Ltd.  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen  
518107  
China  
Tel: +86 755 3330 5088  
Fax: +86 755 3330 5099  
[pfg.cs.asia@meas-spec.com](mailto:pfg.cs.asia@meas-spec.com)

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.