

Model 3031 Accelerometer



SMD Accelerometer
Miniature DC Response
Piezoresistive MEMS
High-g Over-Range Protection

The **Model 3031** is a silicon MEMS accelerometer designed for demanding mid to high volume applications. The accelerometer is ideal for applications requiring a miniature light weight accelerometer with wide frequency bandwidth. The model 3031 incorporates a 3rd generation MEMS sensing element providing superior long-term stability. The accelerometer provides a millivolt output signal and features mechanical overload stops that provide high-g shock protection.

FEATURES



- $\pm 50g$ to $\pm 100g$ Range (higher ranges available on model 3038)
- Surface Mount Package
- 3rd Generation MEMS Element
- Light Weight
- DC Response, Gas Damping
- Over-Range Stops
- Low Power Consumption

APPLICATIONS

- Vibration & Shock Monitoring
- Embedded Applications
- Surface Mount Package
- Machinery
- Transportation
- Instrumentation



dimensions

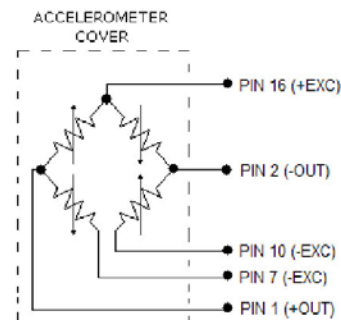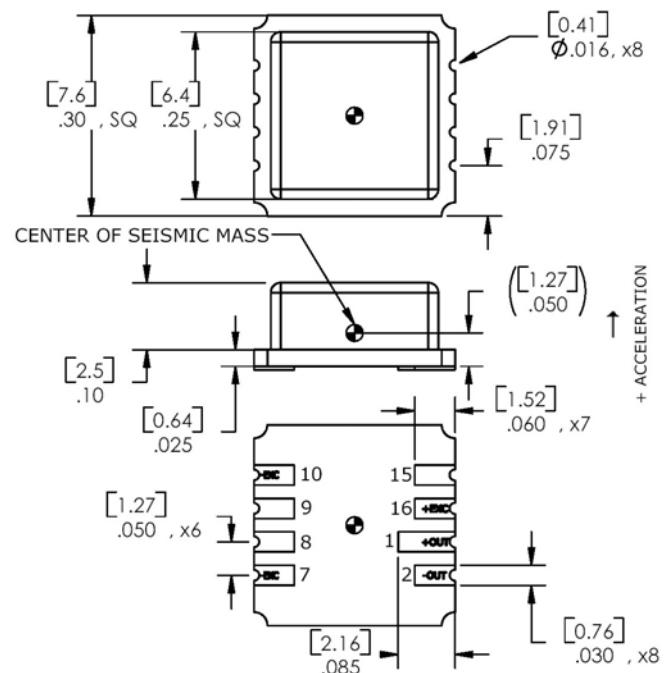

US Patents 5,103,667; 5,253,510; 5,445,006 apply

Model 3031 Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 5Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1002 for Embedded DC Accelerometers.

Parameters

DYNAMIC

Range (g)	±50	±100
Sensitivity (mV/g) ¹	0.6-1.5	0.3-0.6
Frequency Response (Hz)	0-1000	0-1500
Natural Frequency (Hz)	4000	6000
Non-Linearity (%FSO)	±0.5	±0.5
Transverse Sensitivity (%)	3	3
Damping Ratio	0.7	0.7
Shock Limit (g)	5000	5000

Notes

@5Vdc Excitation
±5%

ELECTRICAL

Zero Acceleration Output (mV)	±25	±25
Excitation Voltage (Vdc)	2 to 10	2 to 10
Input Resistance (Ω)	2500 to 6500	2500 to 6500
Output Resistance (Ω)	2500 to 6500	2500 to 6500
Insulation Resistance (MΩ)	>100	>100
Residual Noise (μV RMS)	10	10
Ground Isolation	Isolated from Mounting Surface	

Differential

@50Vdc
Maximum

ENVIRONMENTAL

Thermal Zero Shift (%FSO/°C)	-0.09	-0.09
Thermal Sensitivity Shift (%/°C)	-0.15	-0.15
Operating Temperature (°C)	-40 to 125	
Compensated Temperature (°C)	Not Compensated	
Storage Temperature (°C)	-40 to 125	

Typical
Typical

See Note 2

PHYSICAL

Case Material	Ceramic
Weight (grams)	0.3
Mounting	Solder

¹ Output is ratiometric to excitation voltage

² Order model 3031-XXX-10196 for temperature compensation resistor values included in the calibration certificate.

³ The maximum recommended soldering temperature is +260°C

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING Model Number+Range

3031-GGG

I
I _____ Range (050 is 50 g)

Example: 3031-050
Model 3031, 50g