

Model 3255A Accelerometer




PC Board Mountable Accelerometer
Amplified Output
Temperature Compensated
High Over-Range Protection



The **Model 3255A** is a signal conditioned board mountable MEMS accelerometer available in $\pm 25g$ to $\pm 500g$ ranges. The package can be mounted in one of two orientations, allowing the measurement axis to be either parallel or perpendicular to the mounting surface without the use of costly brackets. The accelerometer incorporates integral temperature compensation and offers a flat frequency response from DC to 1500Hz.

dimensions

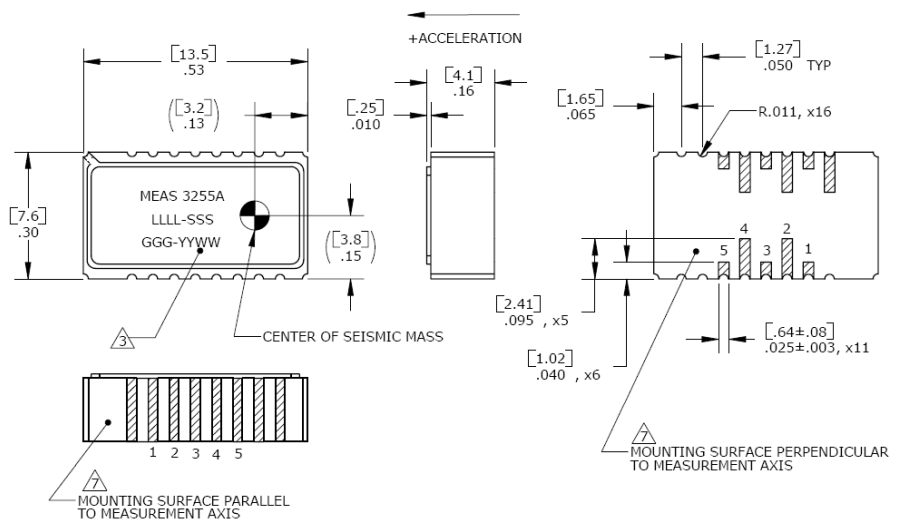


FEATURES

- $\pm 25g$ to $\pm 500g$ Ranges
- Three Axis Mounting Options
- Surface Mount Package
- DC Response, Gas Damping
- Hermetically Sealed
- 5Vdc Excitation

APPLICATIONS

- Impact & Shock Testing
- Vibration & Shock Monitoring
- Embedded Applications
- Transportation Measurements

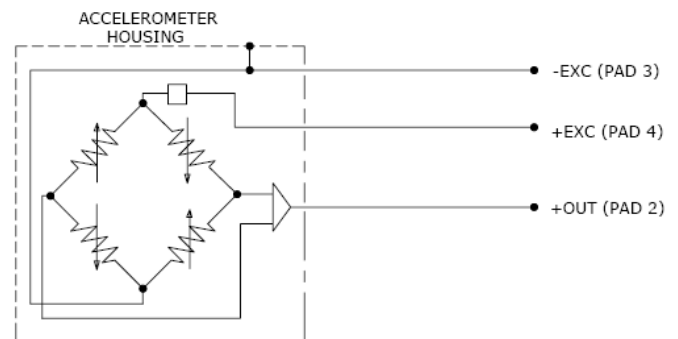

US Patents 5,103,667; 5,253,510; 5,445,006; 5,503,016; and 5,616,863 apply

Model 3255A Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 5Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1002 for Embedded DC Accelerometers.

Parameters

DYNAMIC

| | ±25 | ±50 | ±100 | ±250 | ±500 | Notes |
|----------------------------|-------|--------|--------|--------|--------|-------------------------------|
| Range (g) | ±25 | ±50 | ±100 | ±250 | ±500 | |
| Sensitivity (mV/g) ±10% | 80.0 | 40.0 | 20.0 | 8.0 | 4.0 | @5Vdc Excitation ¹ |
| Frequency Response (Hz) | 0-800 | 0-1000 | 0-1200 | 0-1500 | 0-1500 | ±5% |
| Natural Frequency (Hz) | 4000 | 4000 | 6000 | 8000 | 10000 | |
| Non-Linearity (%FSO) | ±0.5 | ±0.5 | ±0.5 | ±0.5 | ±0.5 | |
| Transverse Sensitivity (%) | <3 | <3 | <3 | <3 | <3 | <1 Typical |
| Damping Ratio | 0.7 | 0.7 | 0.7 | 0.6 | 0.5 | Typical |
| Shock Limit (g) | 5000 | 5000 | 5000 | 5000 | 5000 | |

ELECTRICAL

| | 2.5±0.10 | 2.5±0.10 | 2.5±0.10 | 2.5±0.10 | 2.5±0.10 | Notes |
|---------------------------------------|--------------------------------|------------|------------|------------|------------|--------------|
| Zero Acceleration Output (V) | 2.5±0.10 | 2.5±0.10 | 2.5±0.10 | 2.5±0.10 | 2.5±0.10 | Single-Ended |
| Excitation Voltage (Vdc) ¹ | 2.7 to 5.5 | 2.7 to 5.5 | 2.7 to 5.5 | 2.7 to 5.5 | 2.7 to 5.5 | |
| Excitation Current (mA) | <5 | <5 | <5 | <5 | <5 | |
| Bias Voltage (Vdc) | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | |
| Full Scale Output Voltage (Vdc) | ±2.0 | ±2.0 | ±2.0 | ±2.0 | ±2.0 | |
| Output Impedance (Ω) | <100 | <100 | <100 | <100 | <100 | |
| Insulation Resistance (MΩ) | >100 | >100 | >100 | >100 | >100 | @100Vdc |
| Residual Noise (µV RMS) | 800 | 400 | 400 | 400 | 400 | Passband |
| Ground Isolation | Isolated from Mounting Surface | | | | | |

ENVIRONMENTAL

| | | | | | |
|----------------------------------|-------------|--------|--------|--------|--------|
| Thermal Zero Shift (%FSO/°C) | ±0.018 | ±0.018 | ±0.018 | ±0.018 | ±0.018 |
| Thermal Sensitivity Shift (%/°C) | ±0.021 | ±0.021 | ±0.021 | ±0.021 | ±0.021 |
| Operating Temperature (°C) | -54 to +121 | | | | |
| Compensated Temperature (°C) | -20 to +85 | | | | |
| Storage Temperature (°C) | -54 to +121 | | | | |

PHYSICAL

| | |
|----------------|---------|
| Case Material | Ceramic |
| Weight (grams) | 1.5 |
| Mounting | Solder |

¹Output is ratiometric with excitation voltage.

²Do not electrically connect undesignated pads in sensor application. Except pad 5 may be tied to pad 4 without affecting performance.

³Maximum ratings without damage:

- Excitation voltage: +5.5Vdc
- ESD protection: 4kV
- Solder reflow temperature: +260°C (10 seconds)

⁴Adhesive underfill suggested for high-g applications.

Calibration supplied: CS-SENS-0100 NIST Traceable Amplitude Calibration at 100Hz

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING Model Number+Range

3255A-GGG

|

| _____ Range (050 is 50 g)

Example: 3255A-050
Model 3255A, 50g