

Pressure transmitters

ATM.ECO



Technical Specifications

Pressure measuring range (bar)

	0.1 ... 0.5, (1)	> 0.5 ... 2	> 2 ... 100
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure	> 200 bar	> 200 bar	> 850 bar
Accuracy, (4), (\pm % FS)	≤ 0.25	≤ 0.25	≤ 0.25
Total Error, (5), (\pm % FS)			
0...70 °C, (typ. / max.)	$\leq 1.0 / 1.5$	$\leq 0.7 / 1.0$	$\leq 0.7 / 1.0$
-25...100 °C, (typ. / max.)	$\leq 2.0 / 2.5$	$\leq 1.0 / 1.5$	$\leq 1.0 / 1.5$
Response time, (typ.)	< 1ms / 10...90% FS	< 1ms / 10...90% FS	< 1ms / 10...90% FS
Long term stability, (6)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 100 ... 600, (2), (3)	> 600 ... 1000
Overpressure	3 x FS ($\leq 850 / \leq 1500$ bar)	1500 bar
Burst pressure	> 850 / ≤ 1500 bar	> 1500 bar
Accuracy, (4), (\pm % FS)	≤ 0.25	≤ 0.25
Total Error, (5), (\pm % FS)		
0...70 °C, (typ. / max.)	$\leq 0.7 / 1.0$	$\leq 0.7 / 1.0$
-25...100 °C, (typ. / max.)	$\leq 1.0 / 1.5$	$\leq 1.0 / 1.5$
Response time, (typ.)	< 1ms / 10...90% FS	< 1ms / 10...90% FS
Long term stability, (6)	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

(1) 50 mbar on request

(2) Titanium available ≤ 400 bar (burst pressure > 550 bar)

(3) Overpressure and burst pressure 1500 bar (stainless steel) optional

(4) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

(5) Total error including accuracy and temperature influences at maximum signal span (16 mA / 10 V DC)

(6) 1 year (typ. / max.), the long term stability can be improved by aging (burn-in) the sensor

Temperature range

Operating temperature	-40...125 °C
Process temperatur	-40...150 °C
Storage temperatur	-40...125 °C

Electrical specifications

	4 ... 20 mA	0 ... 5 V / 0 ... 10 V
Power supply	9...33 V DC	12...30 V DC
Supply influence	< 0.05% FS	< 0.05% FS
Current consumption		3 mA
Circuit diagram		
Load resistance		$R_L > 10k\Omega$
Load influence	< 0.05% FS	< 0.05% FS

Qualifications

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	10g (4...2000 Hz / ± 10 mmp)	
EN 60068-2-27	Shock	100g (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dBμV/m (0.03...1 GHz)	
EN 61000-4-2	Electrostatic discharge	8 kV contact 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...2.7 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 Ω Line-Earth: 1 kV/42 Ω	Lightning
EN 61000-4-6	Conducted RF	10 V (0.15...80 MHz, 3 s)	Frequency converters

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (Standard), EPDM, Kalrez
Cable	PUR, PTFE, PE

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview
-------------------	----------------------

Additional documents

Operating and safety instructions

	Article number
10.88.0092	DMM029


Ordering information

		X. XXXX.	XXXX.	XX.	XXX
Type	ATM.ECO				
Pressure type	Gauge	1			
	Absolute (vacuum)	2			
	Sealed gauge	3			
Pressure measuring range	Any pressure measuring ranges between 0...100 mbar and 0...1000 bar available, (1), (2), (3)	XX			
Process connection	G 1/4 F, (Fig. 1)	00			
	G 1/4 M, (Fig. 2)	11			
	G 1/2 M, (Fig. 3)	13			
	G 1/2 M, frontal diaphragm, (Fig. 4)	14			
	G 1/2 M, flush diaphragm, (Fig. 5)	15			
	1/4 NPT M, (Fig. 6)	10			
	1/2 NPT M, (Fig. 7)	19			
	Customized connection available	XX			
Electrical connection	DIN 43650, demountable, IP 65, (Fig. 8), (4)		01		
	Binder 723, 5-pin, IP 67, (Fig. 9), (4)		03		
	Binder 723, 5-pin, demountable, IP 67, (Fig. 10), (4)		43		
	MIL C26482, 10-6, IP 40, (Fig. 11), (4)		06		
	PE cable, IP 67, (Fig. 12), (5), (6)		13		
	PUR cable, IP 67, (Fig. 12), (5), (7)		15		
	PTFE cable, IP 67, (Fig. 12), (5)		21		
	Customized connection available		XX		
Output signal	4...20 mA		05		
	0...5 V DC		46		
	0...10 V DC		47		
Accuracy	≤ ± 0.25 % FS			1	
Temperature range	0...70 °C compensated (allowed process temperature: -25...85 °C)			0	
	-25...85 °C compensated (allowed process temperature: -25...100 °C)			1	
	-25...100 °C compensated (allowed process temperature: -25...150 °C)			2	
Option 1	Throttle, (8)				A
	Special oil filling: ASEOL Food (for food applications)				G
	Special oil filling: Halocarbon (for oxygen applications), (9)				H
Option 2	Electronics packed in gel: Gauge pressure				C
	Electronics packed in gel: Absolute pressure				D
Option 3	Version titanium				K
	Seals: Viton (standard)				U
	Seals: EPDM				S
	Seals: Kalrez				T


- (1) 50 mbar on request
- (2) Titanium available \leq 400 bar (burst pressure > 550 bar)
- (3) mbar, PSI, kPa etc. available
- (4) Cable socket connector not included
- (5) Please specify the required cable length and medium
- (6) Suitable for drinking water (food approved)
- (7) For operating temperature > 50°C, PE or PTFE cable must be used
- (8) Only with pressure connection Fig. 2, Fig. 3, Fig. 6 and Fig. 7
- (9) Maximum pressure measuring range \leq 270 bar (burst pressure > 400 bar)

Technical drawings





Pressure connections

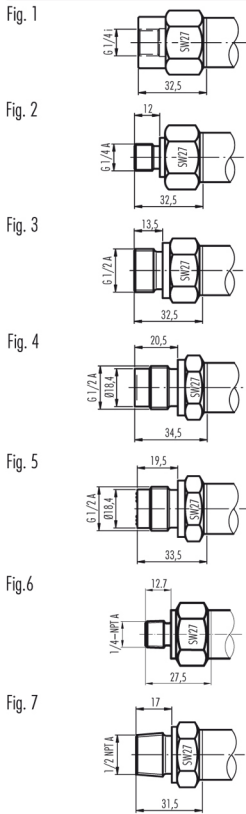

Dimensions

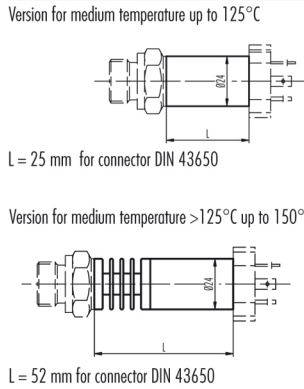

Electrical Connections

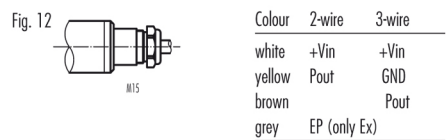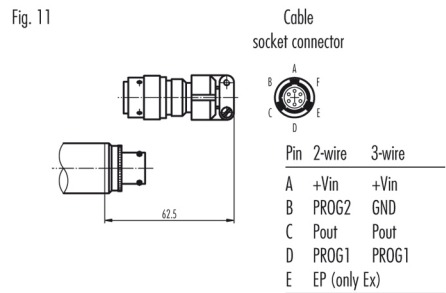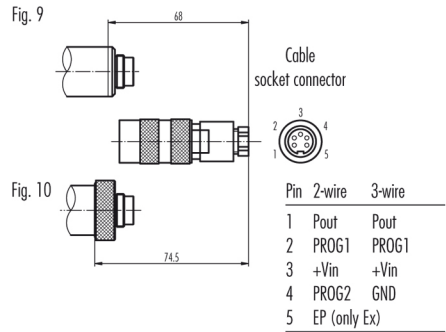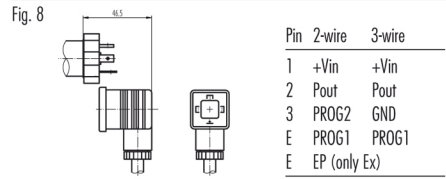

Specifications may change without notice.

STS Great Britain:
 STS Great Britain Ltd.
 Box 3942 | Warwick | CV34 9AE, United Kingdom
 contact@stssensors.com | www.stssensors.co.uk

STS Headquarters, Switzerland:
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stssensors.com | www.stssensors.com

STS France:
 STS France
 844 Route de la Caille, 74350 Allonzier la Caille, France
 info-fr@stssensors.com | www.stssensors.fr

STS Germany:
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stssensors.com | www.stssensors.de

STS Italy:
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stssensors.com | www.stssensors.it