

Technical Specifications

Pressure measuring range (bar)

	0.1 ... 0.5, (1)	> 0.5 ... 2	> 2 ... 25
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure	> 200 bar	> 200 bar	> 200 bar
Accuracy, (4), (\pm % FS)	$\leq 0.5 / \leq 0.25$	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 0.5 / \leq 0.25 / \leq 0.1$
Thermal shift, (\pm % FS/$^{\circ}$C)			
Zero point 0...70 $^{\circ}$ C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25...85 $^{\circ}$ C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0...70 $^{\circ}$ C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25...85 $^{\circ}$ C	≤ 0.02	≤ 0.02	≤ 0.02
Response time, (typ.)	< 1ms/10...90%	< 1ms / 10...90% FS	< 1ms / 10...90% FS
Long term stability, (5)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 25 ... 600, (2), (3)	> 600 ... 1000, (2)
Overpressure	3 x FS ($\leq 850 / \leq 1500$ bar)	1500 bar
Burst pressure	> 850 / ≤ 1500 bar	> 1500 bar
Accuracy, (4), (\pm % FS)	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 1 / \leq 0.5 / \leq 0.25$
Thermal shift, (\pm % FS/$^{\circ}$C)		
Zero point 0...70 $^{\circ}$ C	≤ 0.015	≤ 0.015
Zero point -25...85 $^{\circ}$ C	≤ 0.02	≤ 0.02
Span 0...70 $^{\circ}$ C	≤ 0.015	≤ 0.015
Span -25...85 $^{\circ}$ C	≤ 0.02	≤ 0.02
Response time, (typ.)	< 1ms / 10...90% FS	< 1ms / 10...90% FS
Long term stability, (5)	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

(1) 50 mbar on request

(2) Titanium available ≤ 400 bar (burst pressure > 550 bar)

(3) Overpressure and burst pressure 1500 bar (stainless steel) optional



(4) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

(5) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

Operating temperature	-25...85 $^{\circ}$ C
Process temperatur	-40...150 $^{\circ}$ C
Storage temperatur	-25...85 $^{\circ}$ C

Electrical specifications

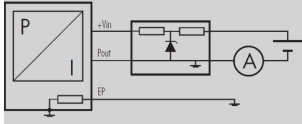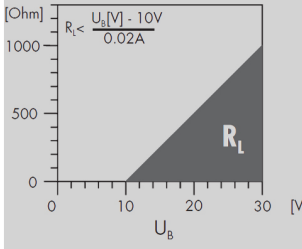	4 ... 20 mA
Power supply	10...30 V DC
Supply influence	< 0.1% FS
Circuit diagram	
Load resistance	
Load influence	< 0.1% FS

ATEX Approval

Certificate, (1)	SEE 99 ATEX 2640		
Gas	II 1G Ex ia IIC T3 / T4 / T6	EN 60079-0 / -11 / -26	
Dust	II 1D Ex iaD 20 IP6x Tx°C	EN 61241-0 / -11	
Mining	I M1 Ex ia I	EN 50303	
Temperature class, (2)	T6	T4	T3
Ambient temperature	-25...55 °C	-25...85 °C	-25...85 °C
Process temperature	-25...55 °C	-25...100 °C	-25...150 °C
Maximum values of the connection circuit	30 V / 100 mA / 1 W		

(1) For detailed Ex specifications see certificate and operating an safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL Approval

Certificate	40868-01 HH
Field of application	C, EMC1

Additional approvals

FM	3027351
CSA	2012692

Qualifications

	Description	Level	Typical interferences
EN 61000-4-2	Electrostatic discharge	8 kV contact 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...2.7 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	2 kV	Motors, valves
EN 61000-4-5	Surge	10 kA (8 / 20 µs), (1)	Lightning
EN 61000-4-6	Conducted RF	10 V (0.15...80 MHz, 3 s)	Frequency converters

(1) Only with optional surge (lightning) protection

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (Standard), EPDM, Kalrez
Cable	PUR, PTFE

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview

Additional documents

Operating and safety instructions

	Article number
10.88.0092	DMM029

Ordering information


		X. XXXX.	XXXX.	XX.	XXX
Type					
	ATM/EX	33			
Pressure type					
	Gauge	1			
	Absolute (vacuum)	2			
	Sealed gauge	3			
Pressure measuring range					
	Any pressure measuring ranges between 0...100 mbar and 0...1000 bar available, (1), (2), (3)	XX			
Process connection					
	G 1/4 F, (Fig. 1)	00			
	G 1/4 M, (Fig. 2)	11			
	G 1/4 M, manometer DIN 16288, (Fig. 3)	12			
	G 1/2 M, (Fig. 4)	13			
	G 1/2 M, frontal diaphragm, (Fig. 5)	14			
	G 1/2 M, flush diaphragm, (Fig. 6)	15			
	G 1/2 M, manometer DIN 16288, (Fig. 7)	16			
	1/4 NPT M	10			
	1/2 NPT M, (Fig. 8)	19			
	Customized connection available	XX			
Electrical connection					
	DIN 43650, demountable, IP 65, (Fig. 10), (4)		01		
	Binder 723, 5-pin, IP 67, (Fig. 11), (4)		03		
	Binder 723, 5-pin, demountable, IP 67, (Fig. 12), (4)		43		
	MIL C26482, 10-6, IP 40, (Fig. 13), (4)		06		
	PUR cable, blue, IP 67, (Fig. 14), (5), (6)		17		
	PTFE cable, blue, IP 67, (Fig. 14), (5)		22		
	Customized connection available		XX		
Output signal					
	4...20 mA		05		
	4...20 mA with surge (lightning) protection		08		
Accuracy					
	≤ ± 0.5 % FS			0	
	≤ ± 0.25 % FS			1	
	≤ ± 0.1 % FS (on request)			2	
Temperature range					
	T6 (Ta: -25...55 °C) 0...70 °C compensated (allowed process temperature: -25...55°C)			0	
	T4 (Ta: -25...85 °C) -25...85 °C compensated (allowed process temperature: -25...100°C)			1	
	T3 (Ta: -25...85 °C) -25...85 °C compensated (allowed process temperature: -25...150°C)			2	
Option 1					
	Throttle, (7)				A
	Special oil filling: ASEOL Food (for food applications)				G
	Special oil filling: Halocarbon (for oxygen applications), (8)				H
Option 2					
Option 3					
	Version titanium				K
	Seals: Viton (standard)				U
	Seals: EPDM				S

Seals: Kalrez					T
Ageing					Z


- (1) 50 mbar on request
- (2) Titanium available \leq 400 bar (burst pressure > 550 bar)
- (3) mbar, PSI, kPa etc. available
- (4) Cable socket connector not included
- (5) Please specify the required cable length and medium
- (6) For operating temperature > 50°C, PTFE cable must be used
- (7) Only with pressure connection Fig. 2, Fig. 3, Fig. 4, Fig. 7 and Fig. 8
- (8) Maximum pressure measuring range \leq 270 bar (burst pressure > 400 bar)

Technical drawings


Pressure connections

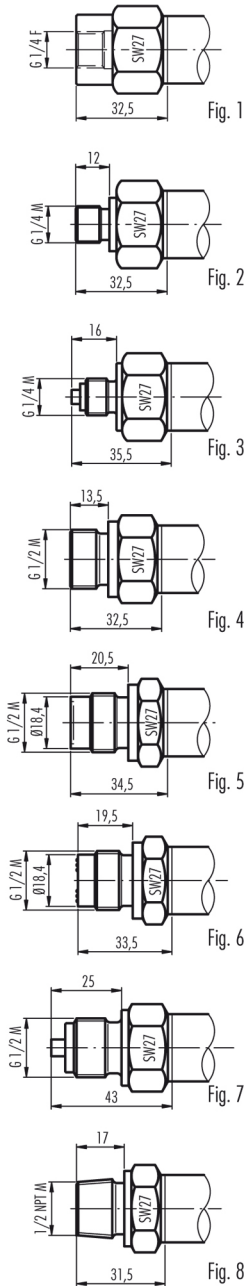

Dimensions

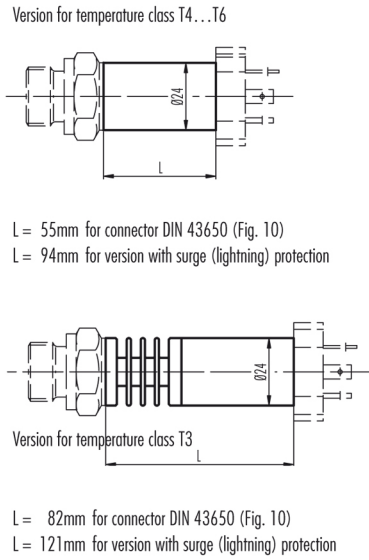

Electrical connections

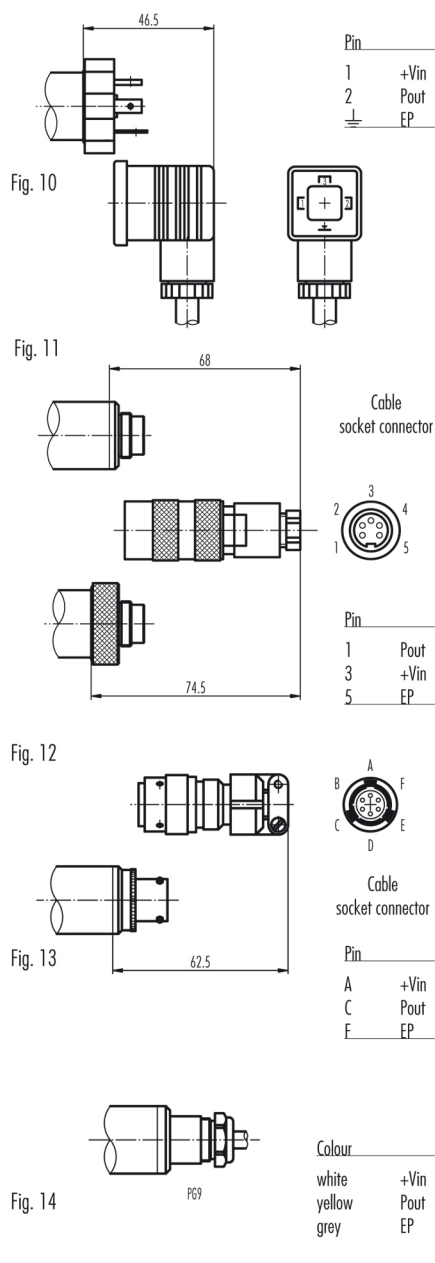

Specifications may change without notice.

STS Great Britain:
STS Great Britain Ltd.
Box 3942 | Warwick | CV34 9AE, United Kingdom
contact@stssensors.com | www.stssensors.co.uk

STS Headquarters, Switzerland:
STS Sensor Technik Sirmach AG
Rüthhofstrasse 8, 8370 Sirmach, Switzerland
sales@stssensors.com | www.stssensors.com

STS France:
STS France
844 Route de la Caille, 74350 Allonzier la Caille, France
info-fr@stssensors.com | www.stssensors.fr

STS Germany:
STS Sensoren Transmitter Systeme GmbH
Poststrasse 7, 71063 Sindelfingen, Germany
info-de@stssensors.com | www.stssensors.de

STS Italy:
STS Italia s.r.l.
Via Gesù 5, 20090 Opera (Milano), Italy
info-italia@stssensors.com | www.stssensors.it