

Intrinsically safe level transmitters

ATM.1ST/N/Ex



Technical Specifications

Pressure measuring range (mH2O)

	1 ... 5, (1)	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure	> 200 bar	> 200 bar	> 200 bar
Accuracy, (2), (\pm % FS)	≤ 0.1	≤ 0.1	≤ 0.1
Total Error, (3), (\pm % FS)			
-5...50 °C, (typ. / max.)	$\leq 0.8 / 1.0$	$\leq 0.3 / 0.5$	$\leq 0.3 / 0.5$
-5...80 °C, (typ. / max.)	$\leq 1.3 / 1.5$	$\leq 0.75 / 1.0$	$\leq 0.75 / 1.0$
Response time, (typ.)	< 1ms / 10...90% FS	< 1ms / 10...90% FS	< 1ms / 10...90% FS
Long term stability, (4)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

(1) 0.5 mH2O on request

(2) Zero based accuracy according to DIN16086, incl. hysteresis and repeatability at ambient temperature

(3) Total error including accuracy and temperature influences at maximum signal span (16 mA / 10 V DC)

(4) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

Operating temperature	-5...80 °C
Process temperature	-5...80 °C
Storage temperature	-10...80 °C

Electrical specifications

	4 ... 20 mA
Power supply	9...28 V DC
Supply influence	< 0.05% FS
Circuit diagram	
Load resistance	
Load influence	< 0.05% FS

ATEX Approval

Certificate, (1)	SEV 09 ATEX 0108		
Gas	II 1G Ex ia IIC T3 / T4 / T6	EN 60079-0 / -11 / -26	
Dust	II 1D Ex iaD 20 IP6x Tx°C	EN 61241-0 / -11	
Mining	I M1 Ex ia I	EN 50303	
Temperature class, (2)	T6	T4	T3
Ambient temperature	-5...50 °C	-5...80 °C	-5...80 °C
Process temperature	-5...50 °C	-5...80 °C	-5...80 °C
Maximum values of the intrinsically safe circuit	28V / 93 mA / 0.65W		

(1) For detailed Ex specifications see certificate and operating an safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL Approval

Certificate	75878-09 HH
Field of application	C, H, EMC1

Additional approvals

IEC Ex	IEC Ex SEV 10.0003
---------------	--------------------

Qualifications

	Standard	Level	Typical interferences
EN 60068-2-6	Vibration	10g (4...2000 Hz / ± 10 mmp)	
EN 60068-2-27	Shock	100g (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dB μ V/m (0.03...1 GHz)	
EN 61000-4-2	Electrostatic discharge	8 kV contact 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...2.7 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 Ω Line-Earth: 1 kV/42 Ω	Lightning
EN 61000-4-6	Conducted RF	10 V (0.15...80 MHz, 3 s)	Frequency converters

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez
Cable	PUR, PTFE

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview
-------------------	----------------------

Additional documents

Operating and safety instructions

10.88.0092	Article number DMM029
-------------------	--------------------------

Ordering information

		X. XXXX.	XXXX.	XX.	XXX
Type	ATM.1ST/N/Ex				
Pressure type	Gauge	1			
	Absolute (vacuum)	2			
Pressure measuring range	Any pressure measuring ranges between 0...1 mH ₂ O and 0...250 mH ₂ O available, (1), (2)	XX			
Process connection	Closed, (Fig. 1)	55			
	Open, (Fig. 2)	56			
	G 1/4 M, (Fig. 3)	11			
	G 1/2 M, (Fig. 3)	13			
	Customized connections available	XX			
Electrical connection	Connectable version, IP 68, (Fig. 4), (3)		07		
	PUR cable, blue, IP 68, (4), (5)		17		
	PTFE cable, blue, IP 68, (4)		22		
	Customized connection available		XX		
Output signal	4...20 mA		05		
Accuracy	≤ ± 0.1 % FS			1	
Temperature range	T6 (Ta: -5...50 °C) -5...50 °C compensated (allowed process temperature: -5...50°C)			3	
	T4 (Ta: -5...80 °C) -5...80 °C compensated (allowed process temperature: -5...80°C)			5	
Option 1	Special oil filling: ASEOL Food (for food applications)				G
	Special oil filling: Halocarbon (for oxygen applications)				H
Option 2					
Option 3	Ballast weight				B
	Version titanium				K
	Seals: Viton (standard)				U
	Seals: EPDM				S
	Seals: Kalrez				T
	Aging				Z

(1) 0.5 mH₂O on request

(2) mH₂O, mWS, mWC etc. available

(3) Connector with required cable has to be ordered separately (KART100)

(4) Please specify the required cable length and medium

(5) For operating temperature > 50°C, PTFE cable must be used

Technical drawings

Dimensions

Fig. 1 Closed version

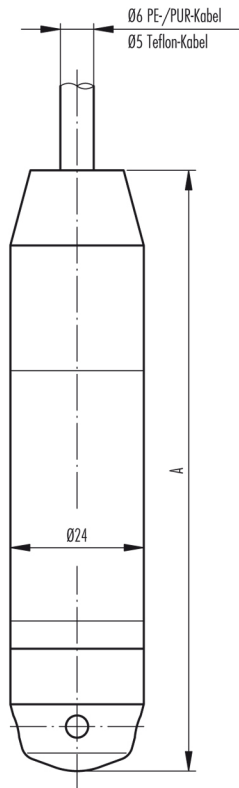


Fig. 2 Open version

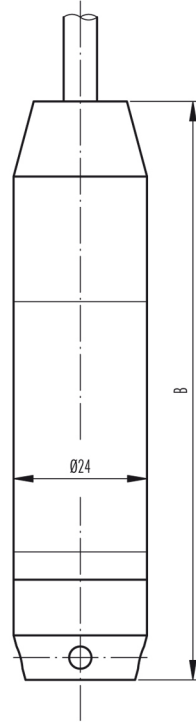


Fig. 3 With process connection


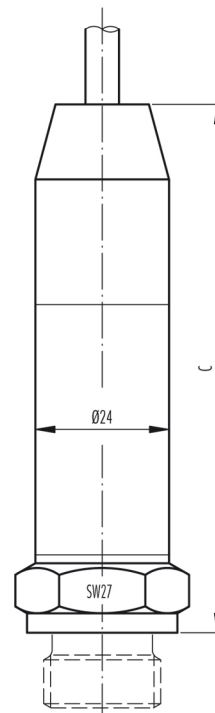


Fig. 4 Electrical connection, connectable

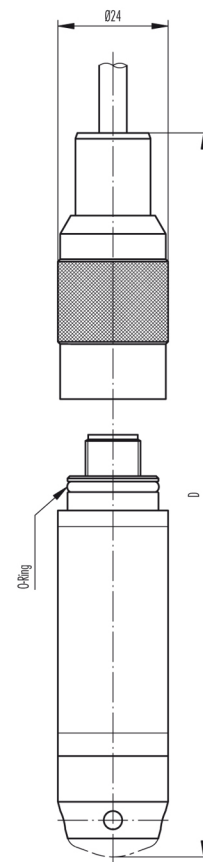

	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]
without ballast weight	88	84	on request*	119*	ca. 145
with ballast weight	175	171	on request*	201*	ca. 405

*C: Depending on process connection

Colour	2-wire	3-wire
white	+Vin	+Vin
yellow	Pout	GND
brown		Pout
grey	EP (only Ex)	

Specifications may change without notice.

STG Great Britain:

STG Great Britain Ltd.
Box 3942 | Warwick | CV34 9AE, United Kingdom
contact@stssensors.com | www.stssensors.co.uk

STG Headquarters, Switzerland:

STG Sensor Technik Sirmach AG
Rüthofstrasse 8, 8370 Sirmach, Switzerland
sales@stssensors.com | www.stssensors.com

STG France:

STG France
844 Route de la Caille, 74350 Allonzier la Caille, France
info-fr@stssensors.com | www.stssensors.fr

STG Germany:

STG Sensoren Transmitter Systeme GmbH
Poststrasse 7, 71063 Sindelfingen, Germany
info-de@stssensors.com | www.stssensors.de

STG Italy:

STG Italia s.r.l.
Via Gesù 5, 20090 Opera (Milano), Italy
info-italia@stssensors.com | www.stssensors.it