

Programmable level and temperature transmitters

## PTM/N/SDI-12

---



# Technical Specifications

## Pressure measuring range (mH2O)

	> 5 ... 20	> 20 ... 250
<b>Overpressure</b>	3 x FS ( $\geq 3$ bar)	3 x FS
<b>Burst pressure</b>	> 200 bar	> 200 bar
<b>Accuracy, (1), (<math>\pm</math> % FS)</b>	$\leq \pm 0.1$	$\leq \pm 0.1$
<b>Thermal shift, (<math>\pm</math> % FS/<math>^{\circ}</math>C)</b>		
Zero point -5...50 $^{\circ}$ C	$\leq 0.03$	$\leq 0.015$
Span -5...50 $^{\circ}$ C	$\leq 0.015$	$\leq 0.015$
<b>Long term stability, (2)</b>	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

- (1) Zero based accuracy according to DIN 16086, incl. hysteresis and repeatability at ambient temperature  
(2) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

## Temperature measuring range

<b>Standard</b>	-25...85 $^{\circ}$ C
<b>Accuracy, (1)</b>	$\leq \pm 0.3$ / $\leq \pm 0.5$ $^{\circ}$ C

- (1) -5...50  $^{\circ}$ C, typ. / max.

## Temperature range

<b>Operating temperature</b>	-5...80 $^{\circ}$ C
<b>Process temperature</b>	-5...80 $^{\circ}$ C
<b>Storage temperature</b>	-10...80 $^{\circ}$ C

## Electrical specifications

<b>Output</b>	
Interface	SDI-12
Protocol	SDI-12 V1.3
<b>Resolution</b>	
Pressure	0.01% FS
Temperature	0.05 $^{\circ}$ C
<b>Measuring units, (1)</b>	
Pressure	mbar, bar, mWC, mH2O, psi, inWC, ftWC, inH2O
Temperature	$^{\circ}$ C, $^{\circ}$ F, K
<b>Power supply</b>	8...30 V DC
Supply influence	< 0.1% FS
Current consumption sleep mode	< 0.5 mA
Current consumption active mode	< 6 mA
<b>Cable length, (max.)</b>	250 m (850 ft)

- (1) Adjustable

---

## Qualifications

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	4g (4...100 Hz / $\pm$ 3.2 mmpp)	
EN 60068-2-27	Shock	100g (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dB $\mu$ V/m (0.03...1 GHz)	
EN 61000-4-2	Electrostatic discharge	4 kV contact 8 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...1 GHz)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/2 $\Omega$ Line-Earth: 1 kV/12 $\Omega$	Lightning
EN 61000-4-6	Conducted RF	10 V (0.15...230 MHz, 3 s)	Frequency converters

---

## Physical specifications

<b>Materials</b>	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (Standard), EPDM, Kalrez
Cabel	PUR, PTFE, PE

(1) Hastelloy (C-276) on request

## Equipement

---

### Overview

10.00.0091	Accessories overview

## Additional documents

---

### Manual

	Article number	Description
10.00.0292		User Manual

---

### Operating and safety instructions

	Article number
10.00.0137	DMM009

## Ordering information

		X. XXXX.	XXXX.	XX.	XXX
<b>Type</b>	PTM/N/SDI-12	49			
<b>Pressure type</b>	Gauge	1			
	Absolute (vacuum)	2			
<b>Pressure measuring range</b>	Any pressure measuring ranges between 0...5 mH <sub>2</sub> O and 0...250 mH <sub>2</sub> O available	XX			
<b>Process connection</b>	Closed, (Fig. 1)	55			
	Open, (Fig. 2)	56			
<b>Electrical connection</b>	PE cable, IP 67, (1), (2)		13		
	PUR cable, IP 67, (1), (3)		15		
	PTFE cable, IP 67, (1)		21		
<b>Output signal</b>	SDI-12		69		
<b>Accuracy</b>	≤ ± 0.1 % FS			2	
<b>Temperature range</b>	-5...50 °C compensated (allowed process temperature: -5...50 °C)			4	
<b>Option 1</b>	Special oil filling: ASEOL Food (for food applications)				G
	Special oil filling: Halocarbon (for oxygen applications)				H
<b>Option 2</b>	Electronics packed in gel: Gauge pressure				C
	Electronics packed in gel: Absolute pressure				D
<b>Option 3</b>	Ballast weight				B
	Version titanium				K
	Seals: Viton (standard)				U
	Seals: EPDM				S
	Seals: Kalrez				T
	Aging				Z

(1) Please specify the required cable length and medium

(2) Suitable for drinking water (food approved)

(3) For operating temperature > 50°C, PE or PTFE cable must be used

# Technical drawings

## Dimensions

Fig. 1: Closed version


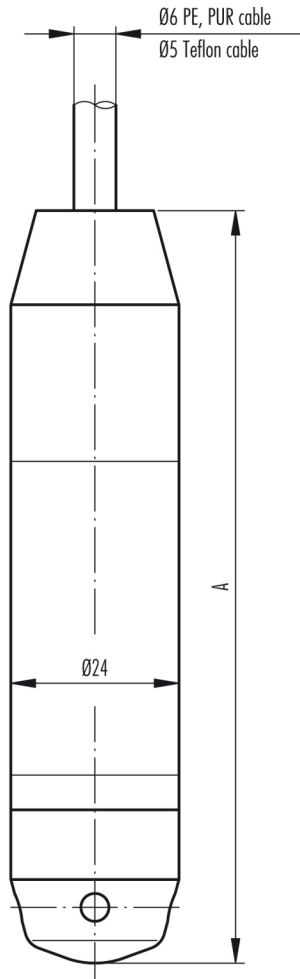


Fig. 2: Open version

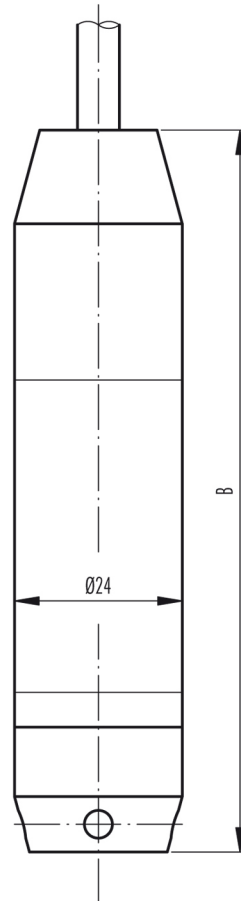

Colour	
white	+Vin
yellow	GND
green	SDI-12

Standard

A [mm]	B [mm]	Weight [g]
157	153	approx. 200

Specifications may change without notice.

**STS Great Britain:**

STS Great Britain Ltd.  
Box 3942 | Warwick | CV34 9AE, United Kingdom  
contact@stssensors.com | www.stssensors.co.uk

**STS Headquarters, Switzerland:**

STS Sensor Technik Sirmach AG  
Rüthhofstrasse 8, 8370 Sirmach, Switzerland  
sales@stssensors.com | www.stssensors.com

**STS France:**

STS France  
844 Route de la Caille, 74350 Allonzier la Caille, France  
info-fr@stssensors.com | www.stssensors.fr

**STS Germany:**

STS Sensoren Transmitter Systeme GmbH  
Poststrasse 7, 71063 Sindelfingen, Germany  
info-de@stssensors.com | www.stssensors.de

**STS Italy:**

STS Italia s.r.l.  
Via Gesù 5, 20090 Opera (Milano), Italy  
info-italia@stssensors.com | www.stssensors.it