

1 SENSOR
INPUT

3 HOUSING
OPTIONS

Every T24 transmitter module can be ordered in **one of three** IP rated enclosures.

To aid your work, they provide:

- Power Supply
- Water & Dust Protection
- Field Connectivity
- Ready-Made Mounting Solution

ACM





ACMi







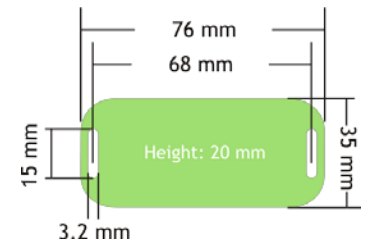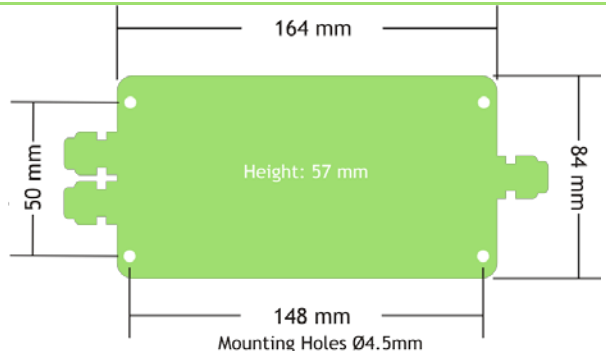

ACMm





Enclosure	ACM	ACMi	ACMm
Wireless range / m	800 m (2,600 ft)		500 m (1,600 ft)
Power supply	5-18 Vdc or 2xD cell	3 Vdc (2xAA)	3 Vdc (2xAAA with BB1)
Battery life at 1 transmission per second*	1 year	5 months	2 months
Antenna	ANTA	ANTA	PCB Printed
Radio frequency	2.4 GHz		
Operating temperature /°C	-20 to +55	-20 to +55	-20 to +55
Environmental protection	IP67		IP50
Module size / mm	164 x 84 x 57	80 x 62 x 34	76 x 35 x 20
Software & configuration	T24 Toolkit & T24LOG100		

Input modules (determined by order code)

					
SA	SA f	IA	VA	TA	PA
Strain	Strain(2kHz)	Current	Voltage	Temperature	Pulse

Order codes: