

1 SENSOR
INPUT

3 HOUSING
OPTIONS

Every T24 transmitter module can be ordered in **one of three** IP rated enclosures.

To aid your work, they provide:

- Power Supply
- Water & Dust Protection
- Field Connectivity
- Ready-Made Mounting Solution

ACM











ACMi

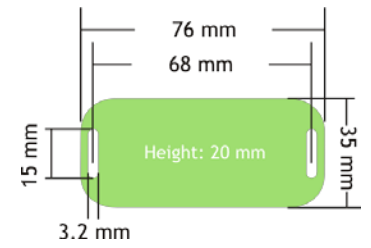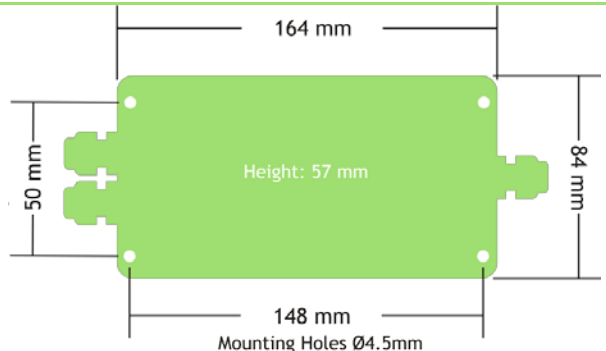

ACMm





Enclosure	ACM	ACMi	ACMm			
Wireless range / m	800 m (2,600 ft)		500 m (1,600 ft)			
Power supply	5-18 Vdc or 2xD cell	3 Vdc (2xAA)	3 Vdc (2xAAA with BB1)			
Battery life at 1 transmission per second*	1 year	5 months	2 months			
Antenna	ANTA	ANTA	PCB Printed			
Radio frequency	2.4 GHz					
Operating temperature /°C	-20 to +55	-20 to +55	-20 to +55			
Environmental protection	IP67		IP50			
Module size / mm	164 x 84 x 57	80 x 62 x 34	76 x 35 x 20			
Software & configuration	T24 Toolkit & T24LOG100					
Input modules (determined by order code)	 SA Strain  SA f Strain(2kHz)  IA Current  VA Voltage  TA Temperature  PA Pulse					
Order codes:						

*For more information please refer to the T24 Acquisition Module Battery Life Calculator